



RFM 300KPa(3bar)


油箱顶置回油过滤器 Tank-Top Return Filters



32



80

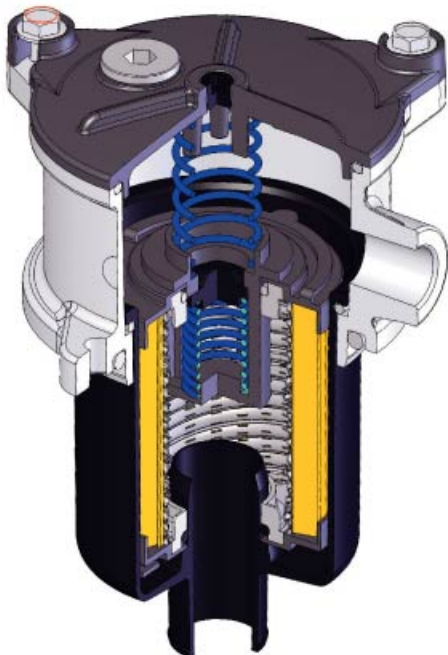

材料

滤头和顶盖: 铝

下壳体: 聚酰胺或钢板

滤芯: 玻纤, 滤纸, 金属网

压力 (ISO 10771-1:2002)

工作压力: 300KPa(3bar)

滤芯爆破压力: 300KPa (3bar)

旁通阀设置: 170 kPa (1.7 bar) +/-10%

工作温度: -25° to +110° C

MATERIALS

Head & Cover: Aluminium Alloy

Bowl: Polyamide & Zinc Plated Steel

Element: Inorganic Fibers, Paper, Wire Mesh

PRESSURE (ISO 10771-1:2002)

Max working: 300KPa(3bar)

Collapse, differential for the filter element:


300KPa (3 bar)

BYPASS VALVE: Setting: 170 kPa (1.7bar) +/-10%

WORKING TEMPERATURE:

From -25° to +110° C

外廓尺寸
DIMENSIONAL LAYOUT

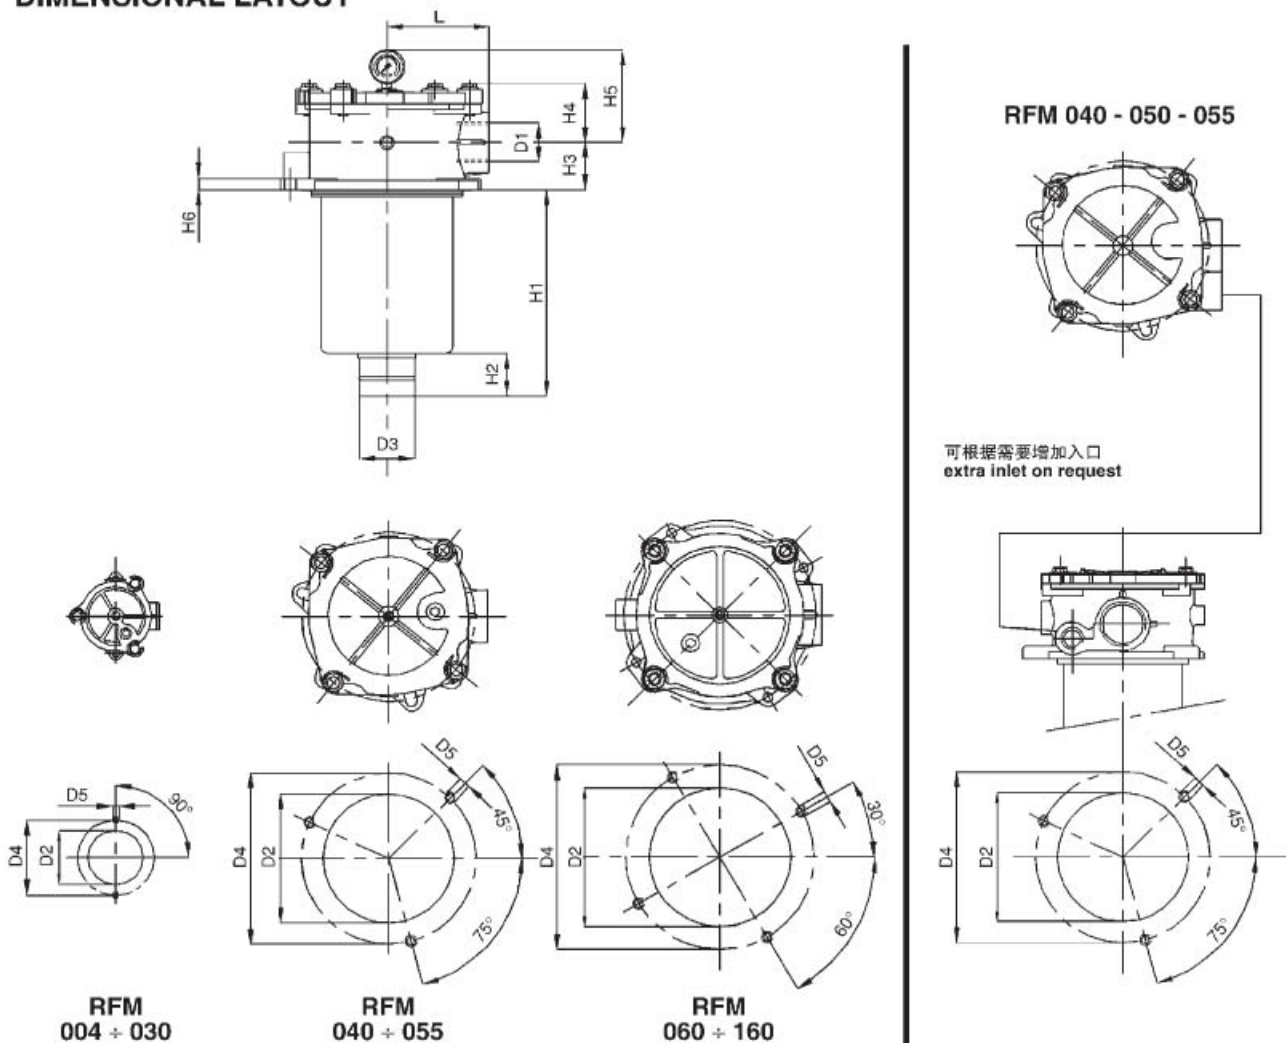

尺寸(mm)与重量(Kg)
DIMENSIONS (mm) AND WEIGHTS (Kg)


型号 Type	D						H						E	Kg
	1	2 min	2 max	3	4	5	1	2	3	4	5	6		
RFM 004	3/8"	50	50	12	80	M6	59	16	12	33	75	9	40	0,3
RFM 008	1/2"	67	68	24	90	M6	80	20	22	33	75	9	50	0,45
RFM 009	M 18 x 1,5	67	68	24	90	M6	80	20	22	33	75	9	50	0,45
RFM 011	M 22 x 1,5	89	90	28	115	M8	102	27	28	47	90	10	67	0,8
RFM 012	1/2"	89	90	28	115	M8	102	27	28	47	90	10	67	0,8
RFM 015	3/4"	89	90	28	115	M8	102	27	28	47	90	10	67	0,8
RFM 020	3/4"	89	90	28	115	M8	150	27	28	47	90	10	67	0,95
RFM 025	1"	89	90	28	115	M8	150	27	28	47	90	10	67	0,95
RFM 030	1"	89	90	40	115	M8	234	30	28	47	90	10	67	1,2
RFM 040	1"	126	131	40	175	M10	248	50	35	56	90	13	95	2,1
RFM 050	1 1/4"	126	131	40	175	M10	248	50	35	56	90	13	95	2,1
RFM 055	1 1/4"	126	131	40	175	M10	265	30	35	56	90	13	95	2,3
RFM 060	1 1/4"	174	180	50	220	M10	178	50	55	69	112	13	115	3,1
RFM 070	1 1/2"	174	180	50	220	M10	178	50	55	69	112	13	115	3,1
RFM 080	1 1/2"	174	180	50	220	M10	240	50	55	69	112	13	115	3,5
RFM 100	1 1/2"	174	180	63,5	220	M10	240	50	55	69	112	13	115	3,6
RFM 110	2" - §	174	180	63,5	220	M10	240	50	55	69	112	13	115	3,65
RFM 125	2" - §	174	180	63,5	220	M10	240	50	55	69	112	13	115	3,65
RFM 150	2" - §	174	180	63,5	220	M10	285	50	55	69	112	13	115	3,8
RFM 160	2" - §	174	180	63,5	220	M10	300	50	55	69	112	13	115	3,85

§ = 2 1/2" further information on request










过滤器总成的压降等于壳体的压降加上清洁滤芯的压降。在选择流量时，过滤器的阻力最好小于50KPa(0.5bar)。

The "Assembly Pressure Drop (ΔP)" is obtained by adding the pressure drop values of the Filter Housing and of the Clean Filter Element corresponding to the considered Flow Rate and it must be lower than 50KPa(0.5bar).

过滤器壳体压降 Filter Housing Pressure Drop

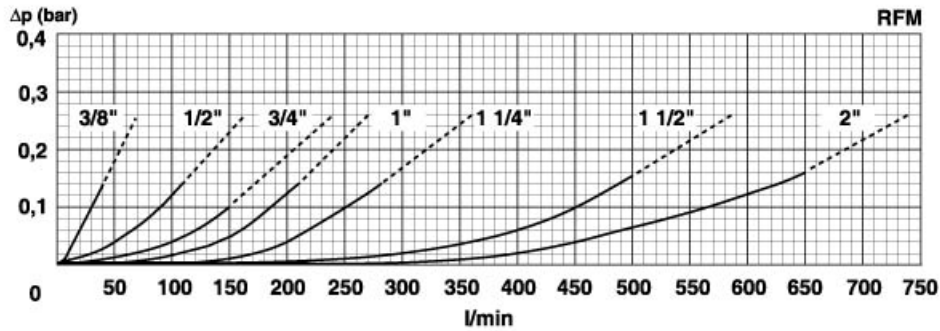


清洁滤芯压降 (玻纤, 纸和金属网) Clean Filter Element Pressure Drop with F + and C+ MS



所有压降曲线是在动力粘度30cSt、密度0.9条件下，按ISO 3968:2005由矿物油试验得到。

N.B. All the curves have been obtained with mineral oil having a kinematic viscosity 30cSt and specific gravity 0,9; according to the specification ISO 3968:2005.

如何选购过滤器
How to order the completed filter

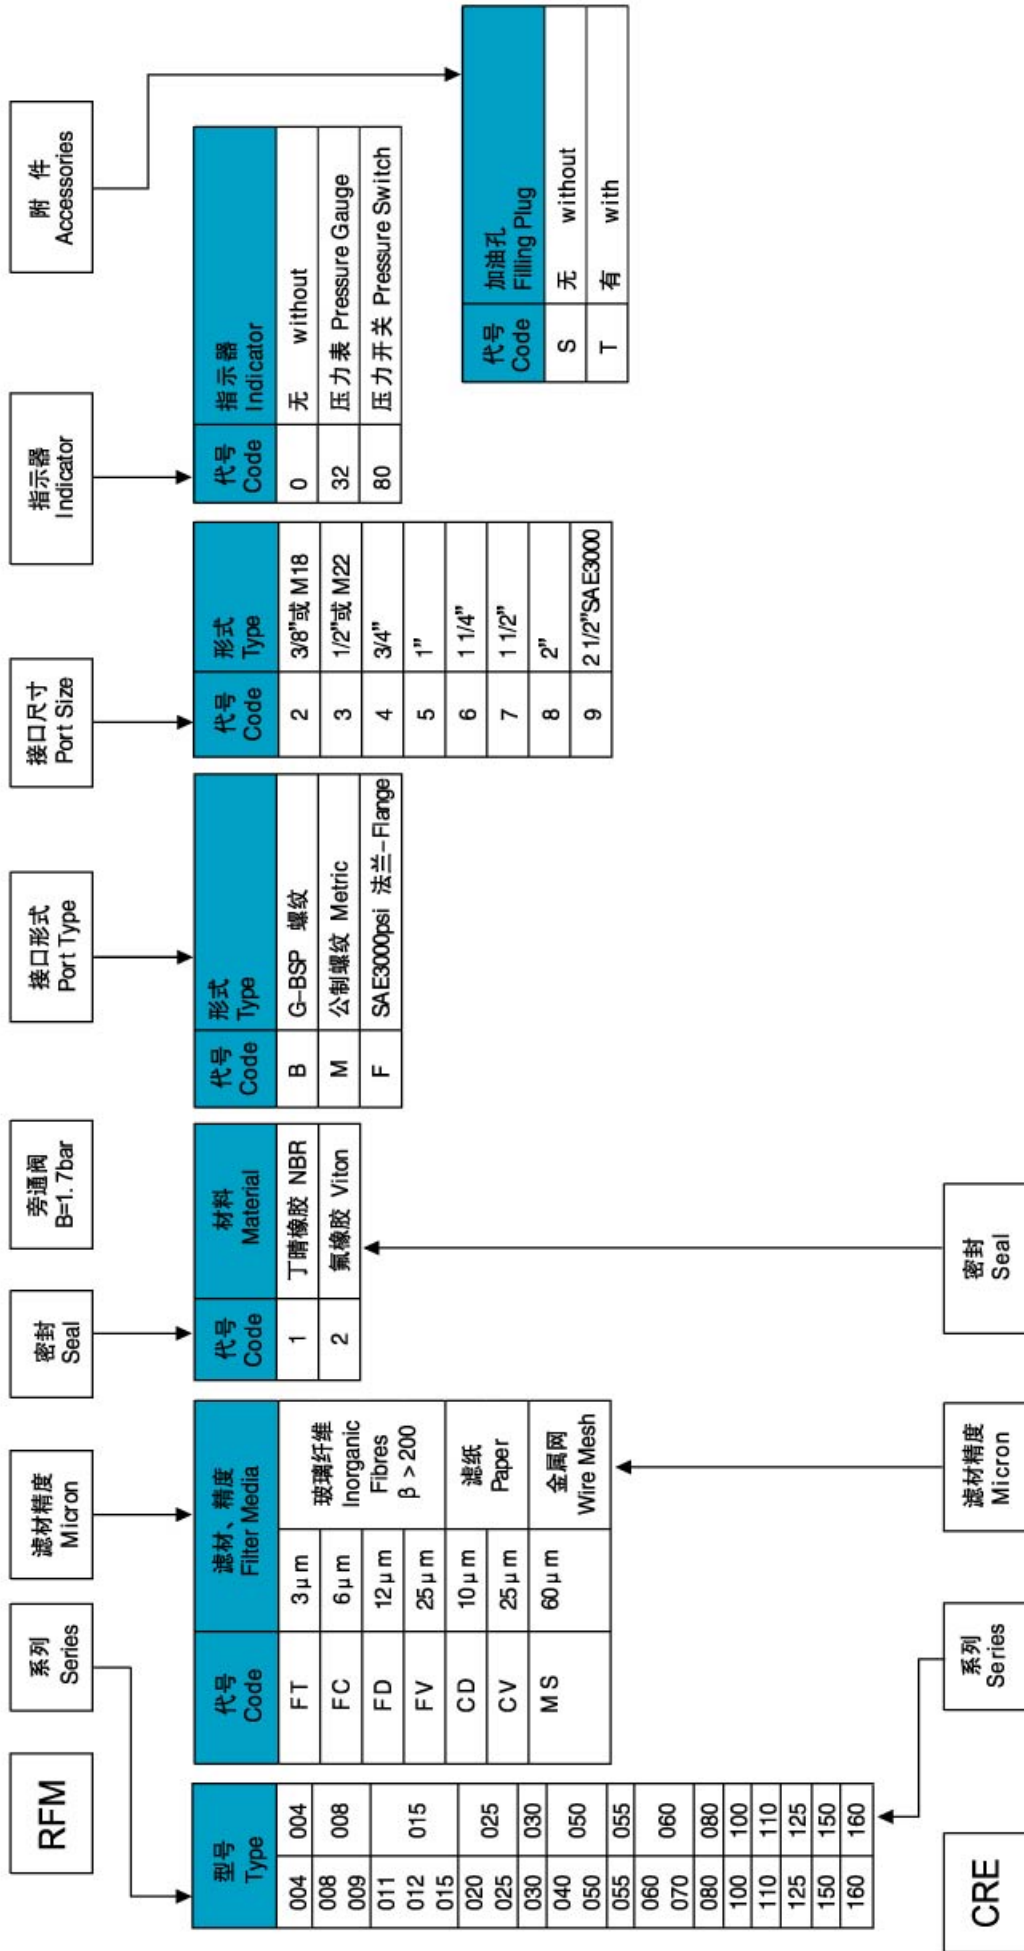

如何选购滤芯
How to order the filter element